


TECH DATA SHEET
PEAM-1044



Where n = 1 - 5

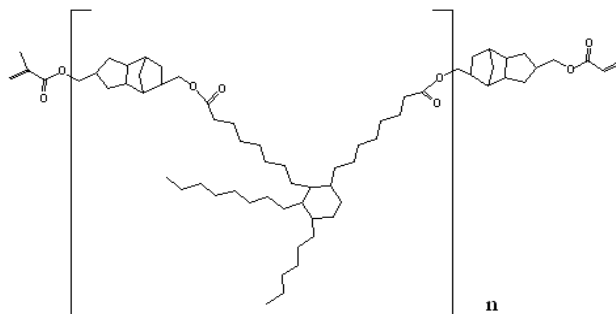

10080 Willow Creek Road
 San Diego, CA 92131
 858-348-1122
 www.designermoleculesinc.com

DESCRIPTION

PEAM-1044 is a polyester acrylate/methacrylate that exhibits excellent adhesion, low warpage, and hydrophobicity. The oligomer has very high thermal stability and low volatility. It can be used as a base resin in a formulation or an additive.

HIGHLIGHTS

- Low warpage
- Hydrophobic
- High adhesion to various substrates
- Thermal stability

SUGGESTED APPLICATIONS

- Adhesives for all substrates
- Low warpage
- High thermal stability

TYPICAL PHYSICAL AND CHEMICAL PROPERTIES

Viscosity @ 25°C (typical)	Haake Rheometer	4500 cps
Appearance		Amber Liquid
Functionality		2
Molecular Weight		1044
Weight Loss @ 300°C	TGA	< 3.0%
Decomposition Temperature	TGA	> 375°C
Recommended Storage Temp		10°C or below

PHYSIOCHEMICAL

Glass Transition Temperature	TMA	-25°C
Cured with 2% Dicumyl Peroxide	DMA	24°C
Coefficient of Thermal Expansion		
Cured with 2% Dicumyl Peroxide	TMA	
		93 ppm/°C
		225 ppm/°C
Dynamic Tensile Modulus		
Cured with 2% Dicumyl Peroxide		
		2600 MPa
	Rheometrics	55 MPa
	Rheometer	15 MPa

*Data is for reference only and may vary depending on testing method used.
 The above structure is an idealized representation of a statistical distribution.*

RECOMMENDED FORMULATION USE:

The PEAM-1044 is recommended for use as a base resin. It has excellent adhesion with low stress due to its high T_g DCPD units. The oligomer has good solubility in both aliphatic and aromatic resins. Exceptionally low warpage can be achieved with the addition of polybutadiene type resins.

CONTACT:

REQUEST A SAMPLE

Dawn Butts

☎ 858-348-1122 ext. 4726

✉ dbutts@designermoleculesinc.com

REF: DMI Part Number: R1111